

COMPANY:

CUSTOMER CLIENT:

TEL:

N° ORDER:

N° LIFT:

STATEMENT REF:

INQUIRY DONE THE:

GUSU111100


Composition:

- 1 wall fastening holder
- 1 T guide fastener
- 2 metallic dowels M10


Additional information:

- Adjustment range: + / - 10 mm
- 1 fastener every 2500 mm

(A) HORIZONTAL POSITION

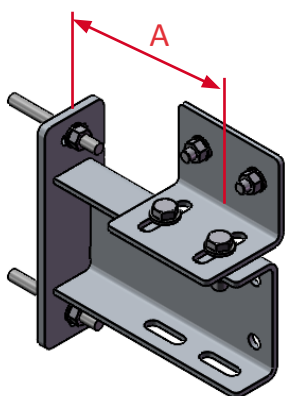

A min. : 80 mm
A max. : 350 mm

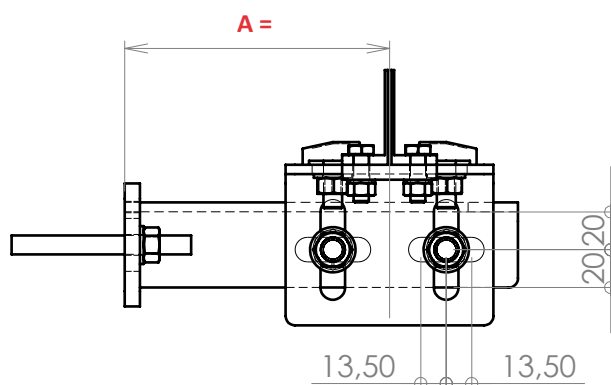


Distance between wall and guides axis: **A =** mm


If there is a variation in dimensions in the shaft over its height:

A min. = **A max. =** mm

(B) VERTICAL POSITION

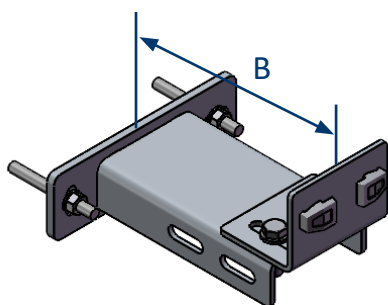

B min. : 105 mm
B max. : 350 mm

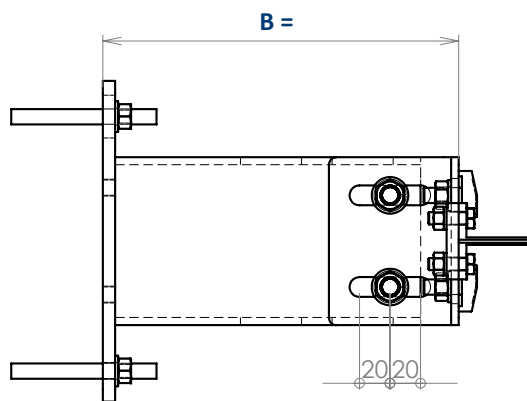

Distance between wall and back of the guide: **B =** mm

If there is a variation in dimensions in the shaft over its height:

B min. = **B max. =** mm

MANUFACTURING INFORMATION*

PRODUCED BY:

TO:

*** NOT BE COMPLETED**

COMPLETED BY:

AT:

TO:

SIGNATURE