

COMPANY:

CUSTOMER CONTACT:

TEL. :

N° ORDER :

N° LIFT :

STATEMENT REF:


INQUIRY DONE THE:

INSTALLATION INFORMATION

CE Lift	Brand :	Model :			
Rated load (Q)	kg	Rated speed	m/s (max. 1.00 m/s)	Levels	
Static load (P)	kg	Tripping speed	m/s (max. 1.30 m/s)	Machine room localisation	
Including: car, beams, door, cladding, equipment The static load is used for the safety gears adjustment					
N°	x Ø ropes	mm	Car	Gear	Top shimming
			Metal	Wood	shimming
			Drum	Traction	Shimming + Base plate
					Stop on guides
					None
Ø eye screws	mm		Stiffeners	Rope anchorage	Type of safety gear
			Yes	No	Anchor
					Spreader
					Instantaneous
					Progressive 1 way
					Progressive 2 ways

INQUIRY ON PIT

Min. shaft width	LG	mm
Min. shaft depth	PG	mm
Pit height	C	mm
Distance guide / shaft mounted doors	GP	mm
Distance guide / back car	GF	mm
Distance guide / low support existing (front)	GGX	mm
Distance guide / low support existing (back)	GFX	mm
Guide nose / left wall	A	mm
Guide nose / right wall	B	mm
Internal car dimensions	LCI x PC	x mm
Platform thickness	PLT	mm
Governor rope / distance of guide	AL up	AL down
Existing DBG (bottom)		mm

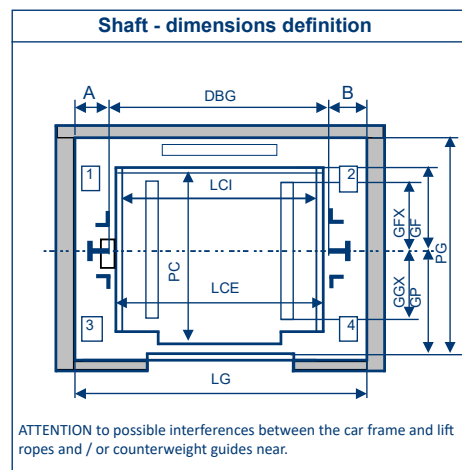

Guide size	K	mm
	K'	mm
	J	mm
	V	mm
	Y	mm
	K ou K'	mm
	J	mm

K or K': Pick the most prominent piece

INQUIRY ON THE LAST LEVEL

Last level height	LLH	mm
External car width	LCE	mm
External car height	HC	mm
Operator / Axis guides dimension	D	mm
Lighting height	H	mm
Existing DBG (top)		mm

Definition overspeed governor


1	2	3	4	Brand*:	Model:	Rope Pull force:
Ø :	mm	Left	Right	Machineroom	Shaft	Pulley room

INQUIRY GOING DOWN

Total number of steps x Height	x	mm
Travel height	m	
Vertical distance between clips of guides	mm	
Existing DEG (between attaches)	mm	

DBG all levels

Level	DBG	Level	DBG	Level	DBG

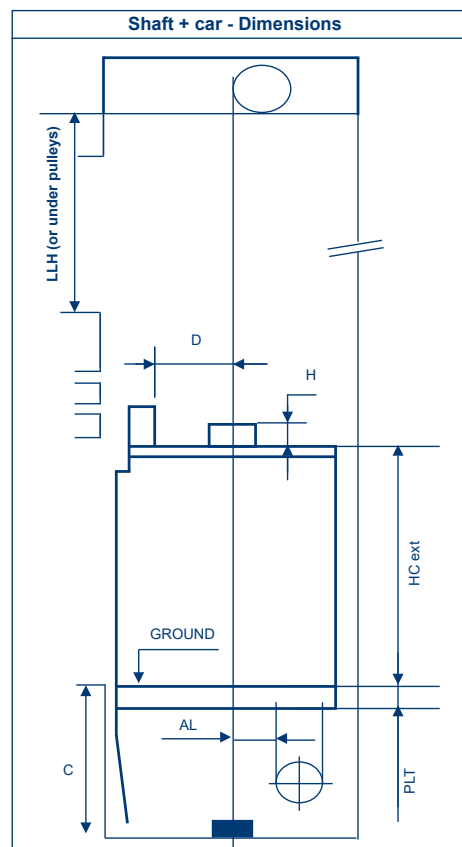

Appendix - Drawings - Photos...

Appendix - Drawings - Photos...

Appendix - Drawings - Photos...

Appendix - Drawings - Photos...